
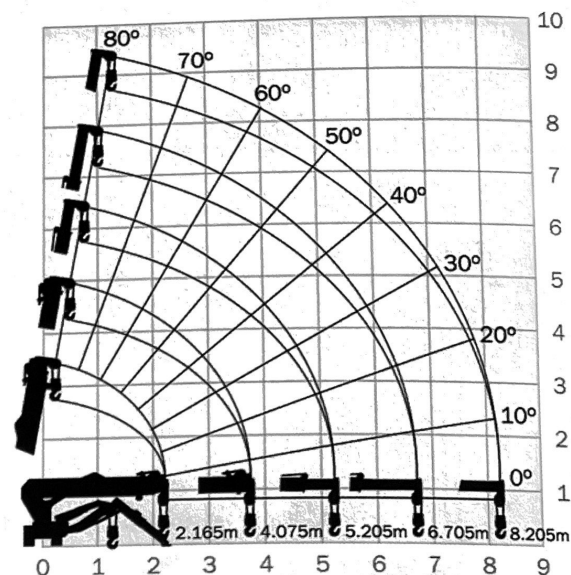



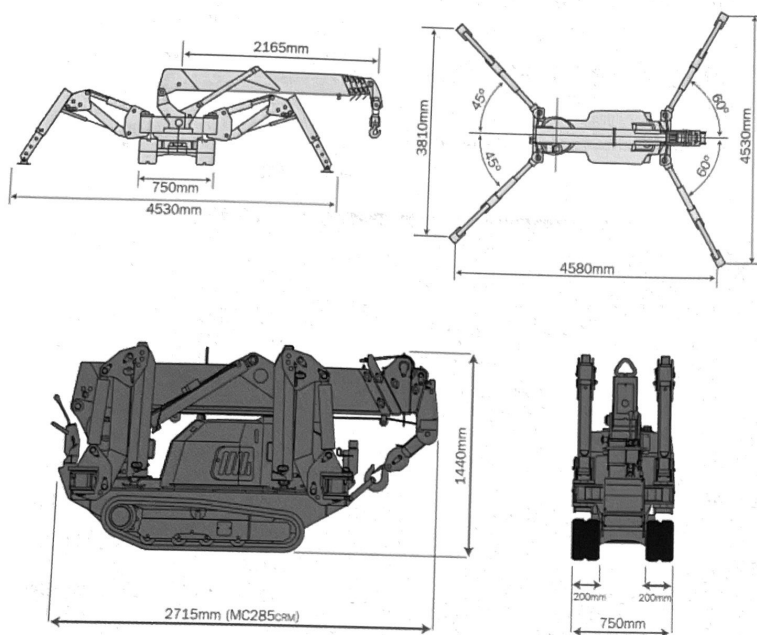


Lyfttabell, fullt utkörda och ansatta stödben

2,53 m / 4,075 m bom		5,575 m bom		7,075 m bom		8,575 m bom	
Arbetsradie (m)	Max. tillåten last (kg)	Arbetsradie (m)	Max. tillåten last (kg)	Arbetsradie (m)	Max. tillåten last (kg)	Arbetsradie (m)	Max. tillåten last (kg)
< 1.4	2820	< 3.0	1220	< 3.6	820	< 4.0	550
1.5	2520	3.5	970	4.0	740	4.5	400
2.0	1920	4.0	780	4.5	580	5.0	340
2.5	1570	4.5	630	5.0	480	5.5	300
3.0	1220	5.0	530	5.5	430	6.0	270
3.5	970	5.205	530	6.0	380	6.5	230
3.705	920			6.5	350	7.0	200
				6.705	330	7.5	180
						8.0	150
						8.205	150

Lyfttabell, stödben i annan position

2,53 m / 4,075 m bom		5,575 m bom		7,075 m bom		8,575 m bom	
Arbetsradie (m)	Max. tillåten last (kg)	Arbetsradie (m)	Max. tillåten last (kg)	Arbetsradie (m)	Max. tillåten last (kg)	Arbetsradie (m)	Max. tillåten last (kg)
< 1.5	1720	< 3.0	510	< 3.6	400	< 4.0	330
2.0	1070	3.5	410	4.0	330	4.5	280
2.5	630	4.0	330	4.5	280	5.0	230
3.0	520	4.5	280	5.0	230	5.5	180
3.5	430	5.0	230	5.5	180	6.0	100
3.705	350	5.205	200	6.0	160	6.5	150
				6.5	150	7.0	100
				6.705	140	7.5	80
						8.0	70
						8.205	60

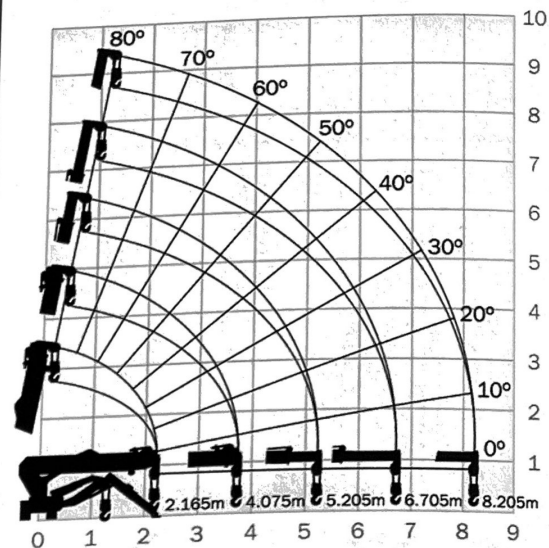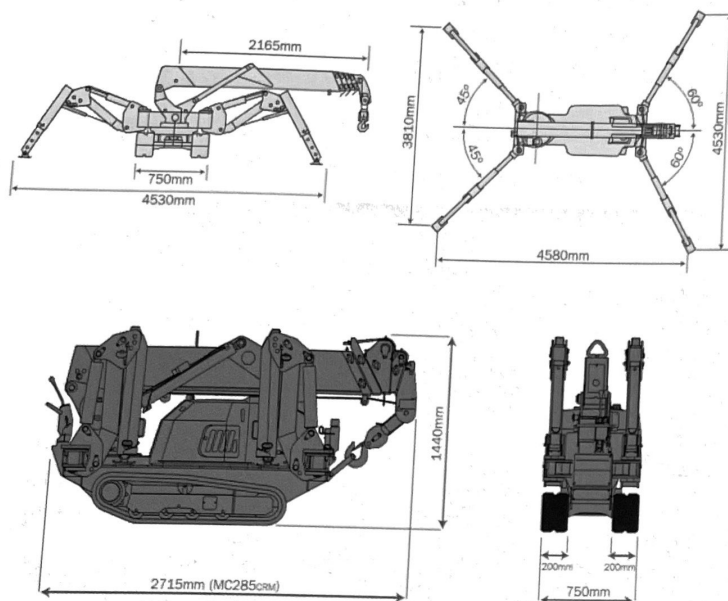

Lyfttabell, fullt utkörd och ansatta stödben

2,53 m / 4,075 m bom		5,575 m bom		7,075 m bom		8,575 m bom	
Arbetsradie (m)	Max. tillåten last (kg)	Arbetsradie (m)	Max. tillåten last (kg)	Arbetsradie (m)	Max. tillåten last (kg)	Arbetsradie (m)	Max. tillåten last (kg)
< 1.4	2820	< 3.0	1220	< 3.0	820	< 4.0	550
1.5	2520	3.5	970	4.0	740	4.5	400
2.0	1920	4.0	780	4.5	580	5.0	340
2.5	1570	4.5	630	5.0	480	5.5	300
3.0	1220	5.0	530	5.5	430	6.0	270
3.5	970	5.205	530	6.0	380	6.5	230
3.705	920			6.5	350	7.0	200
				6.705	330	7.5	180
						8.0	150
						8.205	150

Lyfttabell, stödben i annan position

2,53 m / 4,075 m bom		5,575 m bom		7,075 m bom		8,575 m bom	
Arbetsradie (m)	Max. tillåten last (kg)	Arbetsradie (m)	Max. tillåten last (kg)	Arbetsradie (m)	Max. tillåten last (kg)	Arbetsradie (m)	Max. tillåten last (kg)
< 1.5	1720	< 3.0	510	< 3.0	400	< 4.0	330
2.0	1070	3.5	410	4.0	330	4.5	280
2.5	630	4.0	330	4.5	280	5.0	230
3.0	520	4.5	280	5.0	230	5.5	180
3.5	430	5.0	230	5.5	180	6.0	160
3.705	350	5.205	200	6.0	180	6.5	150
				6.5	150	7.0	100
				6.705	140	7.5	80
						8.0	70
						8.205	60